

SE 110.19 Investigation of Simple Stability Problems



The picture shows SE 110.19 in a frame similar to SE 112.

- * **Representation of simple stability problems on a buckling bar**
- * **Determination of the buckling load under different conditions**
- * **Infinitely variable load application on the buckling bar**

Technical Description

Buckling is a stability problem which occurs in practice when slim components are subjected to compressive loading. Following a "disturbance" to its equilibrium, such as caused by compressive loading, a stable system returns to equilibrium when the loading is removed. If the compressive load increases excessively, instability of the system results. The component buckles and fails. The critical compressive load at which the system becomes unstable is termed the buckling force.

A simple model for representing stability problems is a two-part bar with an elastic joint which remains stable up to a certain load level. If the buckling force is exceeded, the bar suddenly buckles and so becomes unstable.

SE 110.19 is used to investigate simple stability problems on a buckling bar under different conditions. The buckling bar is in two parts, with a central articulated joint. A compressive load is applied to the bar by a lever and weights. The infinitely variable loading is determined precisely with the aid of a scale on the load application lever.

Experiments can depict a variety of conditions, such as an elastic joint or an elastic clamp fixing. Two tension springs serve as the elastic joint. For the elastic clamp fixing option, a steel leaf spring is mounted in the bottom joint. The variable length of the leaf spring means various

degrees of clamping are possible. The two cases can be combined.

Another experiment demonstrates the influence of additional shear forces. It involves applying a shear force to the joint in the buckling bar with a cable and a weight.

In all experiments the buckling bar is placed under load until it reaches an unstable situation. The length of the lever arm at which the buckling bar buckles is read from the scale and the buckling force is then determined.


The various elements of the experiment are clearly laid-out and housed securely in a storage system. The complete experimental set-up is arranged in the frame SE 112.

The well-structured instructional material sets out the fundamentals and provides a step-by-step guide through the experiments.


Learning Objectives / Experiments

- Determination of the buckling force for the case of an:
 - * elastic joint
 - * elastic fixed end support
- Investigation of the buckling behaviour under the influence of:
 - * of additional shear forces
 - * of pre-deformation


SE 110.19 Investigation of Simple Stability Problems

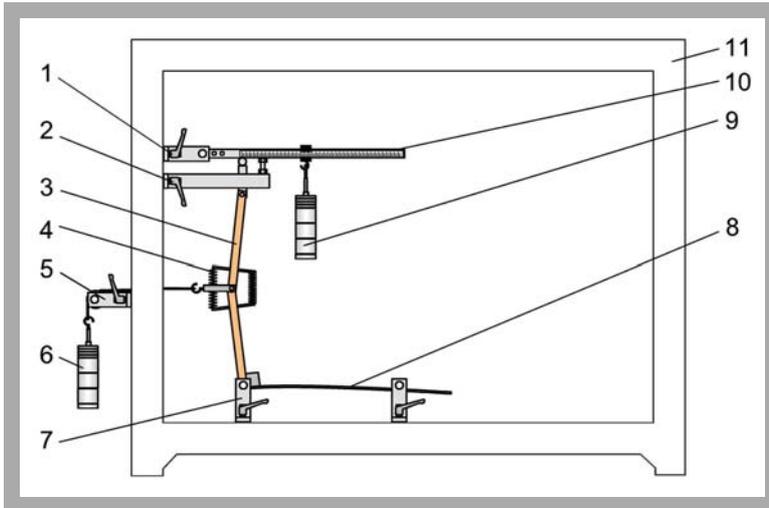

1 articulated support, 2 support with pressure pad and stop screw, 3 buckling bar, 4 articulated spring, 5 deflection roller, 6 weight, 7 articulated support, 8 leaf spring, 9 weight, 10 load application lever with scale, 11 frame SE 112

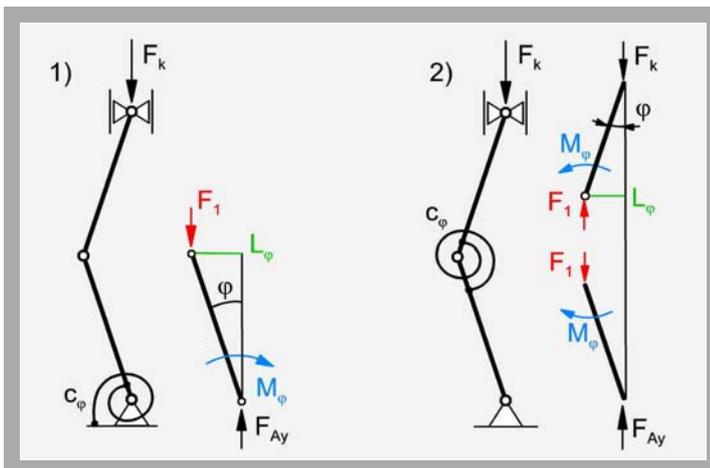

1) experimental set-up for elastic support, 2) experimental set-up for elastic joint; F_k buckling force, F_1 articulation force, F_{Ay} support reaction, M_φ internal bending moment, L_φ deflection, c_φ torsional rigidity, φ deflection angle

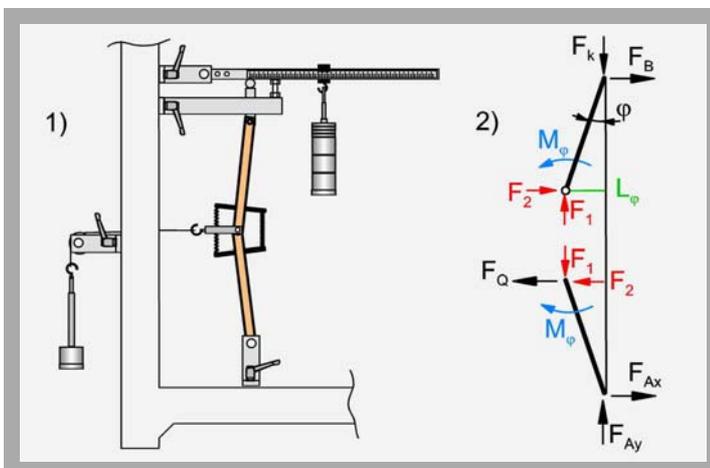

1) experimental set-up for elastic joint with transverse loading, 2) free body diagram; F_Q shear force, F_B and F_{Ax} support reactions

Specification

- [1] Investigation of the buckling load under different conditions (elastic joint, elastic fixed end)
- [2] Two-part buckling bar with central joint
- [3] Loading infinitely variable with lever and set of weights
- [4] Determination of loading via scale on load application lever
- [5] Various degrees of clamping via leaf spring with variable length on bottom support
- [6] Thrust pad guided friction-free inside spherical shell
- [7] Low-friction joints with roller bearings
- [8] Device to generate shear forces
- [9] Storage system to house the components
- [10] Experimental set-up in frame SE 112

Technical Data

- Two-part buckling bar with central joint
- w x h: 20x20mm
 - length: 2x250mm
 - support: pinned-pinned (articulated-articulated)
- Elastic joint
- 2 tension springs, rigidity: 2N/mm
 - lever arm: 50mm
- Elastic clamp fixing with steel leaf spring
- length: 500mm
 - cross-section: 10x2mm
 - 2nd moment of area: 6.66mm⁴
 - modulus of elasticity: 205000N/mm²
- Compressive force range: 25...120N
- Shear force: 0...20N
- Load application lever, lever ratio: 1:2 - 1:5
- Set of weights
- 8x 1N
 - 6x 5N
 - 2x 1N (hangers)

Dimensions and Weight

Weight: approx. 16 kg

Scope of Delivery

- 1 buckling bar, two-part
- 1 set of weights
- 4 supports
- 1 deflection roller
- 1 load application lever
- 1 leaf spring
- 2 tension springs
- 1 cord
- 1 hexagon socket wrench
- 1 storage system
- 1 set of instructional material

Order Details

022.11019 SE 110.19 Investigation of Simple Stability Problems